

PULSAFEEDER®

Pulsafeeder's Pulsation Dampeners improve pump system efficiency by removing pulsating flows from positive displacement pumps, insuring a smooth and continuous fluid flow and metering accuracy, eliminating pipe vibration and protecting gaskets and seals. The result is a longer lasting safer system.

Compressed air or gas is introduced into the air chamber of the Pulsation Dampener to a specified pressure. The gas is entrapped by the elastomeric bladder, which prevents contact between the process fluid and compressed gas. During pump discharge, fluid enters the wetted chamber of the Pulsafeeder Pulsation Dampener, displacing the bladder, compressing the gas and absorbing the shock. During pump shift, liquid pressure decreases, the dampener gas expands, pushing fluid back into the process line.

Whether a piston, plunger, air diaphragm, peristaltic, gear, or diaphragm metering pump a Pulsafeeder Pulsation Dampener placed at the pump's discharge will produce a steady fluid flow up to 99% pulsation free; protecting the entire pumping system from the damaging effects of shock.

Features

- Quick Installation
- In-line Maintenance
- Bodies in a full range of Chemical Resistant materials
- Bladders for even the most corrosive applications


Operating Benefits

- Produces near steady fluid flow
- 99% pulsation and vibration free
- Protects pumping system from pulsation, water hammer, vibrations, and more



Aftermarket

- Double Wall Containment Tanks from 15 to 500 gallons.
- 1, 2, or 4 Drum Spill Containment Pallets.
- Loading Ramp and Pallet with or without Cover.

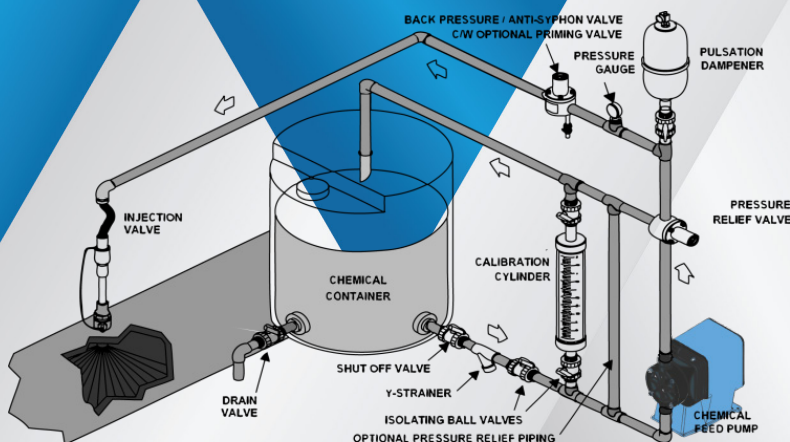

Pulsation Dampener

Pulsation Dampener

Specifications and Model Selection

150 PSI Pulsation Dampeners - Chargeable

Volume	Body	Bladder	Connection	Part Number
10 cubic inches	POLY	EPDM	3/8" FNPT	NA601038-FPPE
		CSPE	3/8" FNPT	NA601038-FPPC
		TFE	3/8" FNPT	NA601038-FPPT
		Viton	3/8" FNPT	NA601038-FPPV
		CSPE	1/2" FNPT	NA601050-FPPC
		TFE	1/2" FNPT	NA601050-FPPT
		Viton	1/2" FNPT	NA601050-FPPV
	PVC	CSPE	1/2" FNPT	NA601050-PVCC
		TFE	1/2" FNPT	NA601050-PVCT
		Viton	1/2" FNPT	NA601050-PVCV
	PVDF	EPDM	3/8" FNPT	NA601038-PVDE
		CSPE	3/8" FNPT	NA601038-PVDC
		TFE	3/8" FNPT	NA601038-PVDT
	316 SS	Viton	3/8" FNPT	NA601038-PVDV
		EPDM	3/8" FNPT	NA601038-316E
		CSPE	3/8" FNPT	NA601038-316C
		TFE	3/8" FNPT	NA601038-316T
85 cubic inches	POLY	Viton	3/8" FNPT	NA601038-316V
		EPDM	3/4" FNPT	NA608575-FPPE
		CSPE	3/4" FNPT	NA608575-FPPC
		TFE	3/4" FNPT	NA608575-FPPT
		Viton	3/4" FNPT	NA608575-FPPV
		EPDM	3/4" FNPT	NA608575-PVDE
	PVDF	CSPE	3/4" FNPT	NA608575-PVDC
		TFE	3/4" FNPT	NA608575-PVDT
		Viton	3/4" FNPT	NA608575-PVDV
	316 SS	EPDM	3/4" FNPT	NA608575-316E
		CSPE	3/4" FNPT	NA608575-316C
		TFE	3/4" FNPT	NA608575-316T
		Viton	3/4" FNPT	NA608575-316V

150 PSI Pulsation Dampeners - Chargeable

Volume	Body	Bladder	Connection	Part Number
370 cubic inches	POLY	EPDM	2" FNPT	NA637020-FPPE
		CSPE	2" FNPT	NA637020-FPPC
		TFE	2" FNPT	NA637020-FPPT
		Viton	2" FNPT	NA637020-FPPV
	PVDF	EPDM	2" FNPT	NA637020-PVDE
		CSPE	2" FNPT	NA637020-PVDC
		TFE	2" FNPT	NA637020-PVDT
		Viton	2" FNPT	NA637020-PVDV
	316 SS	EPDM	2" FNPT	NA637020-316E
		CSPE	2" FNPT	NA637020-316C
		TFE	2" FNPT	NA637020-316T
		Viton	2" FNPT	NA637020-316V
36 cubic inches	POLY	EPDM	3/4" FNPT	NA603675-FPPE
		CSPE	3/4" FNPT	NA603675-FPPC
		TFE	3/4" FNPT	NA603675-FPPT
		Viton	3/4" FNPT	NA603675-FPPV
	PVDF	EPDM	3/4" FNPT	NA603675-PVDE
		CSPE	3/4" FNPT	NA603675-PVDC
		TFE	3/4" FNPT	NA603675-PVDT
		Viton	3/4" FNPT	NA603675-PVDV
	316 SS	EPDM	3/4" FNPT	NA603675-316E
		CSPE	3/4" FNPT	NA603675-316C
		TFE	3/4" FNPT	NA603675-316T
		Viton	3/4" FNPT	NA603675-316V
175 cubic inches	POLY	EPDM	2" FNPT	NA617520-FPPE
		CSPE	2" FNPT	NA617520-FPPC
		TFE	2" FNPT	NA617520-FPPT
		Viton	2" FNPT	NA617520-FPPV
	PVDF	EPDM	2" FNPT	NA617520-PVDE
		CSPE	2" FNPT	NA617520-PVDC
		TFE	2" FNPT	NA617520-PVDT
		Viton	2" FNPT	NA617520-PVDV
	316 SS	EPDM	2" FNPT	NA617520-316E
		CSPE	2" FNPT	NA617520-316C
		TFE	2" FNPT	NA617520-316T
		Viton	2" FNPT	NA617520-316V

Specifications: 150 PSI Maximum Pressure

Engineering Data

Body Materials:

Polypropylene
PVC
PVC
PVDF

Pressure Rating at Ambient Temp:

Temperature Range:

Up to 150 PSI (10 BAR)

-20°F to +250°F

(-29°C to +121°C)

Body Materials:

316 SS

Pressure Rating at Ambient Temp:

Temperature Range:

Up to 150 PSI (10 BAR)

-60°F to +400°F

(-51°C to +204°C)

Bladder Compound:

EPDM
CSPE
Viton
PTFE

Temperature Limits:

-60°F to +280°F (-51°C to +137°C)

-20°F to +275°F (-29°C to +135°C)

-10°F to +350°F (-23°C to +176°C)

+40°F to +220°F (+4°C to +104°C)

Applications:

EPDM -Use in extreme cold; good chemical resistance with ketones, caustics

CSPE -Excellent abrasion resistance; good in aggressive acid applications.

Viton - Use in hot & aggressive fluids; good with aromatics, solvents, acids and oils.

PTFE - Bellows design; excellent flex life; use with highly aggressive fluids.

Viton is a registered trademark of E.I. DuPont Company.

Custom Engineered Designs – Pre-Engineered Systems



Pre-Engineered Systems

Pulsafeeder's Pre-Engineered Systems are designed to provide complete chemical feed solutions for all electronic metering applications. From stand alone simplex pH control applications to full-featured, redundant sodium hypochlorite disinfection metering, these rugged fabricated assemblies offer turn-key simplicity and industrial-grade durability. The UV-stabilized, high-grade HDPE frame offers maximum chemical compatibility and structural rigidity. Each system is factory assembled and hydrostatically tested prior to shipment.

PULSAFEEDER

27101 Airport Road
Punta Gorda, FL 33982
Phone: +1(941) 575-3800
Fax: +1(941) 575-4085

www.pulsatron.com



An ISO 9001 Certified Company

DMP001 E17

IPEX
FLUID & METERING